


THE **RITE**
DOOR®

RITE DOOR TRUE WOOD™

THE ONLY
INTEGRATED
WOOD DOOR
SYSTEM
WITH INSET
HARDWARE

- Wide selection of veneers
- No service contract required
- LEED qualifying
- Lever x Lever hardware available



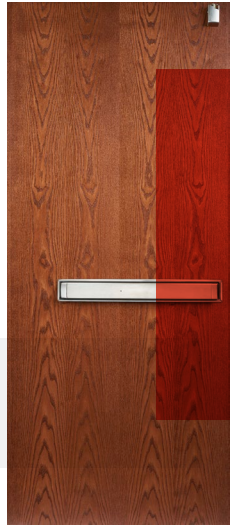

AVAILABLE TRUE WOOD™ DOOR TYPES

WRD-EC, 20

5-PLY ENGINEERED COMPOSITE LUMBER CORE | WDMA/AWS EXTRA HEAVY DUTY | SCLC-5

CONSTRUCTION

Horizontal Edges

- Top and bottom rails – structural composite lumber
- Bonded to core
- 1" minimum after factory trim
- No additional blocking required for thru bolted closers

Vertical Edges

- Matching vertical edges
- Bonded to core

Core

- Structural Composite Lumber
- Meets requires of LEED MR4
- Contains no added Urea-formaldehyde

Fire Rating

- 20 minute fire rating available
- Meets option to UL 10c (positive pressure) Category "A"

WRD-FD 45, 60, 90

5-PLY FIRE CORE | WDMA/AWS EXTRA HEAVY DUTY | FD-5

CONSTRUCTION

Horizontal Edges

- Top and bottom rails – wood or composite material, specific configuration to Label Service Listing
- Bonded to core
- No additional blocking required for bolted closers
- Optional closer and lock block available

Vertical Edges

- Matching vertical edges – wood or composite material, specific configuration to Label Service Listing
- Bonded to core

Core

- Fire Resistant Composite Core per Label Service Listing
- Contains no added Urea-formaldehyde

Fire Rating

- 20, 45, 60, or 90 minute rating available
- 250 degree temperature rise
- Meets option to UL 10c (positive pressure) Category "A"

FACE VENEER

FOR ALL TRUE WOOD DOOR TYPES

Face Veneer

- Available in a wide variety of vertical and horizontal grain wood species and sketch face
- WDMA/AWS "A" Grade, Book and Running Match, standard
- Slip, Balance, and Center Balance Match available upon request
- WDMA/AWS "AA" Grade available upon request
- HPL
- Primed Hardboard



OPTIONS

- Glass and Glazing available upon request

CERTIFICATIONS AND SUSTAINABILITY

- Optional LEED 3.0 credits available
 - > MR 4: Recycled Content (standard)
 - > MR 5: Regional Materials
 - > MR 7: FSC Certified Wood
 - > IEQ 4.4: Low-emitting Materials
- California Air Resources Board (CARB)
- GREENGUARD – Indoor Air Quality and Children in Schools
- Collaborative for High Performance Schools (CHPS)

AVAILABLE HARDWARE



THE RITE DOOR FIRE-RATED EXIT DEVICE

The D3976 RITE Door fire-rated Concealed Vertical Rod Exit Device features a durable, Grade 1, inset exit device that is aesthetically pleasing and allows for a large, clear opening width.

Our unique top latching mechanism interlocks the door to the frame, eliminating the need for, center latches, flush bolts, astragals or coordinators.

A variety of product options are available including:

Silent Electrification Motorized Latch Retraction (SE)

- Near-silent operation and a low current draw allow for lighter gauge wiring and require a reduced-ampere power supply

Request to Exit (REX)–Monitoring/Signal Switches

- Incorporates one or two switches in the pushbar for request to exit (REX) signaling

*See order form for other options



LEVER X LEVER

The D3940 Series Lever X Lever design combines functionality with aesthetics. Levers on either side of The RITE Door activate the top latching mechanism. This time-tested hardware allows each leaf to operate independently eliminating the need for floor strikes, center latches, flush bolts, astragals or coordinators.

All dual lever hardware features the free-wheeling lever mechanism. When the outside lever is locked, it will rotate freely up and down while remaining securely locked. Also available electrified for access control. The D3940 Series meets accessibility guidelines of the American with Disabilities Act, the requirements of the Uniform Federal Accessibility Standards and ANSI 117.1.



THE RITE DOOR TRIM

The W3080 Series Entry Trim provides outside activation for doors with any type of RITE Door exit device. The locked handle is protected from vandalism and forced entry with a breakaway clutching mechanism. Solid construction meets Grade 1 standards.

The W3080 Series Entry Trim features standard lever handles that are designed to return within 1/2" of the door face. Please note that handles in the Designer Series levers do not have this same feature.

AUTO FLUSHBOLT

The D3921 Automatic Flush Bolt with bottom fire bolt for UL 20 minute fire rated wood doors.

**HOSPITALS HOTELS CASINOS HOUSES OF WORSHIP LONG
TERM CARE RETAIL OFFICE BUILDINGS CONVENTION CENTERS
THEATERS UNIVERSITIES K-12 STADIUMS CONFERENCE ROOMS
BANQUET HALLS RESTAURANTS GYMNASIUMS**

Imagine an integrated commercial door system that meets all fire and safety regulations, is easy to install ... and actually enhances your design.

Imagine **The RITE Door**[®], a sleek, all-in-one solution that is as imaginative as it is practical.

The RITE Door's clean site lines and wide range of finishes and options give you the freedom to design doors that complement any architecture.

Pre-installed hardware, trouble-free installation and high performance make it the RITE fit.

**THE RITE
DOOR**[®]

10027 S. 51ST ST.
SUITE 102
PHOENIX, AZ 85044

800.872.3267
RITEDOOR.COM



ASSA ABLOY

ASSA ABLOY is the global leader in door opening solutions, dedicated to satisfying end-user needs for security, safety and convenience

ARM-019-0418

©2014, Hanchett Entry Systems, Inc.,
an ASSA ABLOY Group company.

Send quotes and orders to:
RITEDOOR@ASSAABLOYEMS.COM